

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International publication date

26 May 2005 (26.05.2005)

PCT

(10) International publication number

WO 2005/048431 A1


- (51) International patent classification<sup>7</sup>: H02G 3/08 (72) Inventor; and  
(21) International application number: PCT/EP2004/011307 (75) Inventor/Applicant (US only): HETZER, Ulrich  
[DE/DE]; Zühlsdorfer Strasse 39, 12679 Berlin (DE).  
(22) International filing date: 8 October 2004 (08.20.2004) (74) Joint Representative: KRONE GMBH; Abteilung  
HRP, Beeskowdamm 3-11, 14167 Berlin (DE).  
(25) Language of filing: German  
(26) Language of publication: German  
(30) Data relating to the priority: 103 50 433.8 29 October 2003 (29.10.2003) DE  
(71) Applicant (for all designated States except US): KRONE GMBH [DE/DE]; Beeskowdamm 3-11, 14167 Berlin (DE).  
MOSSNER, Frank [DE/DE]; Welterpfad 56, 12277 Berlin (DE). NAD, Ferenc [DE/DE]; Rüdeshheimer Str. 25, 14197 Berlin (DE).  
(81) Designated states (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.  
(84) Designated states (unless otherwise indicated, for every kind of regional protection available): ARIPO

[continued on next page]

As printed

(54) Title: WALL OUTLET

(54) Bezeichnung: WANDAUSSCHLUSSELEMENT

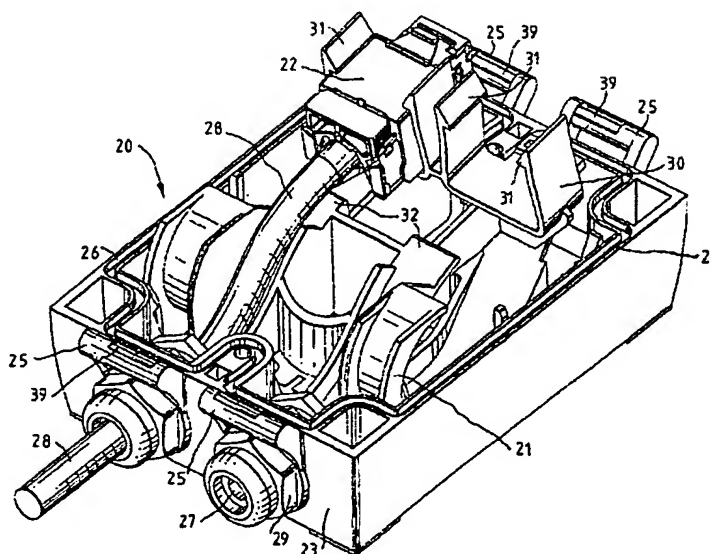

WO 2005/048431 A1

(57) Abstract: The invention relates to a wall outlet comprising a base part (20) having at least one first opening (27) which is used to receive an electric cable (28), and a cover (1). The cover (1) or the base part (20) comprise at least one second opening (3) wherein an electric socket (22) can be inserted. A cable guiding element (21) is arranged in the base part (20), said cable guiding element enabling the electric cable (28) to be guided in a defined manner from the first opening (27) to

[Fortsetzung auf der nächsten Seite]

[continued on next page]

patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.*

**Published:**

- *With International Search Report.*

(57) **Zusammenfassung:** Die Erfindung betrifft eine Wandauslassdose, umfassend ein Unterteil (20) mit mindestens einer ersten Öffnung (27) zur Aufnahme eines elektrischen Kabels (28) und einen Deckel (1), wobei der Deckel (1) oder das Unterteil (20) mindestens eine zweite Öffnung (3) aufweist, in die eine elektrische Buchse (22) einsetzbar ist, wobei in dem Unterteil (20) ein Kabelführungselement (21) angeordnet ist, mittels dessen das elektrische Kabel (28) von der ersten Öffnung (27) zur zweiten Öffnung (3) definiert führbar ist.